

The Original 1 Burner Unit

Model Number # 8113-256-001B

DESCRIPTION

INVISACOOK – 1 Burner Unit is a complete, self-contained system. It has 1 induction points to cook thru your porcelain countertop, evenly and sufficiently. While it has a controller, it can also be controlled thru Wi-Fi using your InvisaCook Tuya App.



APPLICATIONS

1 Burner unit can be used in these options and materials:

- Typical House Kitchen
- Multi-Family (Apartments)
- Boats / RVs / Airplanes
- Tiny Houses
- · Outdoor Kitchens
- Entertaining Islands or Tables
- Cooking Carts
- Materials— Porcelain

FEATURES

- 1 burning unit elements
- Power Boost option for faster speed.
- Wi-Fi capable with the InvisaCook App so you can control your unit from anywhere.
- Designed for Undermounting installation for any countertop surface in any way possible.

DEVICEOPERATION

When a compliant receiver such as an induction quality pan is placed on the induction coil, the unit will automatically adjust the charging power, based on the feedback command from the controller. When searching for connection, LED number will blink red, once pan and unit are connected the LED number will stay illuminated. If the pan moves too far in relation to the induction coil, the LED will blink IC and a Beeping nice will follow, indicating an error in connection. If this (or any other error condition) occurs, try resetting the unit by unplugging it and waiting 10 seconds to reconnect, for an automatic reset.

Status	Indicator
Off	No power/inactive
Power on	LED lights on Red Dash
Connected	LED Number stays illuminated
Lost of Connection	LED Blinking IC Red
Noise Alert	Beeping Noise of no Connection
Error condition	A Letter Followed by a Number(H-8)

FOREIGNOBJECT DETECTION

INVISACOOK—1BurnerUnit-Unit contains an algorithm for sensing the presence of foreign objects placed on the unit. When a foreign object is placed on the transmitter coil during operation, the unit will shut down and the LED will flash red showing IC and make a beeping noise.

INVISACOOK - 1 BURNER UNIT



ELECTRICAL ANDMECHANICALSPECIFICATIONS

Dimension	Description
Dimension	380 x 300 x 55mm

Recommended material	Max thickness is 12mm to 20mm Porcelain
Recommended Breaker	15 AMP Breaker

Connection	Description	
AC Input	220 / 240 Volt	
Wattage	2000 W	
Power	2000w	
Platen Burner Size	210mm	

TEMPERATURE

Operating Cooking Temps	97°F min /400 °F max. (36°C min / 205°C max.)
Non-operating Temps	-40°F to 158°F (-40°C to +70°C)

HUMIDITY

Operating:	To85% relative humidity (non-condensing)
Non-Operating:	To95% relative humidity (non-condensing)

ALTITUD

Operating:	to 10,000 feet
Non-operating:	to 50,000 feet

INVISACOOK - 1 BURNER UNIT



WARRANTY

INVISACOOK—1 Burner Unit—Individual is covered by a 2-year consumer warranty that provides product replacement only and a 3-year extended warranty to be pruchased. Please visit Invisacook.com/warranty for more information.

PRODUCT REGULATORYREQUIREMENTS

Intended Application – Thisproduct is intended for indoor or outdoor covereduse, not for use in inclement weather.

PRODUCT SAFETY

IEC60950-1 (International) WIFI STANDARDSCOMPLIANCE https://en.tuya.com

PRODUCT EMCCOMPLIANCE - CLASS B COMPLIANCE

NOTE: The product is required to comply with Class B emission requirements as the end system that it is configured into is intended for a commercial environment and market place. System is to have minimum of 3db margin to Class B Limits.

UL 858:2014 Ed.16+

EN 55014-1:2017

EN 55014-2:2015+A1:2018

EN 61000-3-2:2019

EN 61000-3-3:2013+A1:2019

CSA C22.2#46:2013 Ed.9

EN 60335-1:2012+A11:2014+A13:2017+A1:2019+A2:2019

+A14:2019


EN 60335-2-9:2019

EN 62233:2008

AU/NZ ISO/IEC 17025

G-MARK GLVD0016-0051



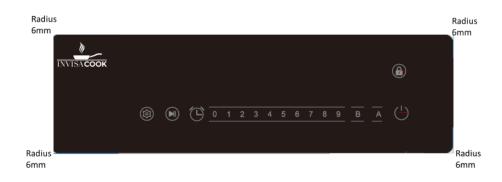


LegalNotices

Information contained in this publication regarding deviceapplications and the like is provided only for yourconvenienceand may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. "Typical" parameters which may be provided in Energydata sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for your application by your technical experts. INVISACOOKMAKESNOREPRESENTATIONSOR WARRANTIESDFANYKINDM-IETHEREPRESSORIMPLIEDWRITTENORORAL, STATUTORYOROTHERWISERELATEDTOTH-IEMFORMATION, INCLUDINGBUTNOTLIMITEDTOTISCONDITION, QUALITY, PERFORMANCEMERCHANTABILITYORHTINESSFORPURPOSES build the Buyerpurchase or use INVISACOOK products for any such unintended or unauthorized application, the Buyershall indemnify and hold. INVISACOOK LLC, and its officers, employees, subsidiaries, affiliates, and distributors harmlessagainstall claims, costs, damages, and expenses, and reasonableattomey fees arising out of, directly or indirectly, any claim of personal injury or deathassociated with such unintended or unauthorized use, evenif such claim alleges that INVISACOOK INC et al, was negligent regarding the design or manufacture of the unit in question or claim. Noticenses are conveyed, implicitly or otherwise, under any INVISACOOK LLC intellectual property rights.

1 BURNER UNIT

INSTALLATION ORIENTATION

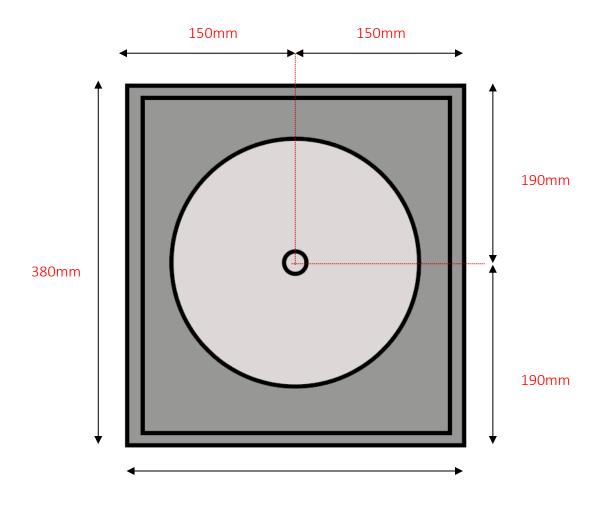

300mm

